




1212, 578 TIANBAO ROAD
SHANGHAI 200086
CHINA

Mainbon Group Company Limited

Outboard Motor Catalog 2008

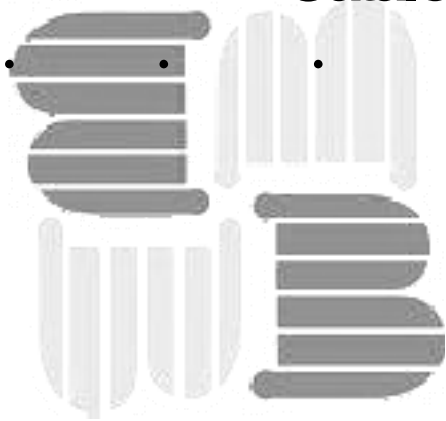

Top Quality



+86 (21) 65150222/0333;



+86 (21) 65150777;



sales@exportscooter.com



1212, 578 TianBao Road, Shanghai 200086 China.



MAINBON GROUP COMPANY LIMITED

Tel: +86 (21) 6515-0222/0333/0993/1039, Fax: +86 (21) 6515-0777
Add: 1212, 578 TianBao Road, ShangHai 200086 China

Catalog

Model: X1.6



Descriptions

1.6HP rated power
43 cc displacement
Max operation range 4000-5000 rpm

Specifications

MODEL	X1.6
SIZE	400270a940 mm
TRANSOM HEIGHT	435 mm
PROPELLER BLADEDIAMETERaPITCH	3x188x145mm
MAX OPERATION RANGE	4000-5000 rpm
DISPLACEMENT	43 cc
RATED. POWER	1.2 kw (1.6HP)
NET WEIGHT	10.2 kg
CONTAINER	427pcs/40HQ





MAINBON GROUP COMPANY LIMITED

Tel: +86 (21) 6515-0222/0333/0993/1039, Fax: +86 (21) 6515-0777
Add: 1212, 578 TianBao Road, ShangHai 200086 China

Catalog

Model: X3.5



Descriptions

3.5HP rated power
74.6 cc displacement
Max operation range 4200-5300 rpm

Specifications

MODEL	X3.5
SIZE	550195a955 mm
TRANSOM HEIGHT	435 mm
PROPELLER 艖 BLADEDIAMETERaPITCH 壩	3x188x145mm
MAX OPERATION RANGE	4200-5300 rpm
DISPLACEMENT	74.6 cc
RATED. POWER	2.6 kw (3.5HP)
NET WEIGHT	13 kg
CONTAINER	505pcs/40HQ





MAINBON GROUP COMPANY LIMITED

Tel: +86 (21) 6515-0222/0333/0993/1039, Fax: +86 (21) 6515-0777
Add: 1212, 578 TianBao Road, ShangHai 200086 China

Catalog

Model: OTH9.9



Descriptions

9.9HP/7.30kw
Water cooled
Manual Start
Tiller control
2stroke outboard engine lubricant

Specifications

MODELS	OTH9.9
Max. Output	9.9HP/7.30KW
Full Throttle Operating Range	4500-5500rpm
Stroke	2
Cylinder	2
Displacement	246ml
Bore X Stroke	56X50mm
Compression Ratio	6.8:1
Length X Width X Height	873X332X1040mm
Weight	36kgs
Gear Ratio	2.08(27:13)
Gear Shift Position	F-N-R
Ignition System	CDI
Cooling System	Water-cooling
Starting System	Manual
Control System	Tiller control
Lubrication System	Mixed fuel & Oil
Capacity Of Fuel Tank	24L
Recommended Oil	Regular lead-free gasoline
Recommended Lubricant	2 stroke outboard engine lubricant
Recommended Gear Oil	Hypoid gear oil-SAE 90
Container Quantity	20'/40': 48/96





MAINBON GROUP COMPANY LIMITED

Tel: +86 (21) 6515-0222/0333/0993/1039, Fax: +86 (21) 6515-0777
Add: 1212, 578 TianBao Road, ShangHai 200086 China

Catalog

Model: OTH15



Descriptions

- 15HP/11kw
- Water cooled
- Manual Start
- Tiller control
- 2stroke outboard engine lubricant

Specifications

Models	OTH15
Max. Output	15HP/11.00KW
Full Throttle Operating Range	4500-5500rpm
Stroke	2
Cylinder	2
Displacement	246ml
Bore X Stroke	56X50mm
Compression Ratio	6.8:1
Length X Width X Height	873X332X1040mm
Weight	36kgs
Gear Ratio	2.08(27:13)
Gear Shift Position	F-N-R
Ignition System	CDI
Cooling System	Water-cooling
Starting System	Manual
Control System	Tiller control
Lubrication System	Mixed fuel & Oil
Capacity Of Fuel Tank	24L
Recommended Oil	Regular lead-free gasoline
Recommended Lubricant	2 stroke outboard engine lubricant
Recommended Gear Oil	Hypoid gear oil-SAE 90
Container Quantity	20'/40': 48/96





MAINBON GROUP COMPANY LIMITED

Tel: +86 (21) 6515-0222/0333/0993/1039, Fax: +86 (21) 6515-0777
Add: 1212, 578 TianBao Road, ShangHai 200086 China

Catalog

Model: OTH40



Descriptions

- 40HP/29.4kw
- Water cooled
- Manual Start
- Tiller control
- 2stroke outboard engine lubricant

Specifications

MODELS	OTH40
Max. Output	40HP/29.4KW
Full Throttle Operating Range	4500-5500rpm
Stroke	2
Cylinder	2
Displacement	703ml
Bore X Stroke	80X70mm
Compression Ratio	0.250694444
Length X Width X Height	1073X402X1350mm
Weight	73.6kg
Gear Ratio	2(26:13)
Gear Shift Position	F-N-R
Ignition System	CDI
Cooling System	Water-cooling
Starting System	Manual
Control System	Tiller control
Lubrication System	Mixed fuel & oil
Capacity Of Fuel Tank	24L
Recommended Oil	Regular lead-free gasoline
Recommended Lubricant	2stroke outboard engine lubricant
Recommended Gear Oil	Hypoid gear oil-SAE 90
Recommended Propeller	3X12-1/4"4X8"~3X11-1/4"X14"
Container Quantity	20'/40': 40/80





MAINBON GROUP COMPANY LIMITED

Tel: +86 (21) 6515-0222/0333/0993/1039, Fax: +86 (21) 6515-0777
Add: 1212, 578 TianBao Road, ShangHai 200086 China

Catalog

Model: F2.5



Descriptions

2.5HP/1.8kw
Water cooled
Manual Start
Tiller control
4stroke outboard engine lubricant

Specifications

MODELS	F2.5
Max. Output	2.5HP/1.8KW
Full Throttle Operating Range (rpm)	5250-5700
Stroke	4
Cylinder	1
Displacement (ml)	72
Bore X Stroke (mm)	54X31.5
Length X Width X Height (mm)	623X345X1021
Weight (kgs)	17
Gear Ratio	2.08(27:13)
Gear Shift Position	F-N
Ignition System	TCI
Cooling System	Water-cooling
Starting System	Manual
Control System	Tiller control
Capacity Of Fuel Tank (L)	0.9
Recommended Oil	Regular lead-free gasoline



EPA



MAINBON GROUP COMPANY LIMITED

Tel: +86 (21) 6515-0222/0333/0993/1039, Fax: +86 (21) 6515-0777
Add: 1212, 578 TianBao Road, ShangHai 200086 China

Catalog

Model: F4



Descriptions

- 4HP/2.9kw
- Water cooled
- Manual Start
- Tiller control
- 4stroke outboard engine lubricant

Specifications

MODELS	F4
Max. Output	4HP/2.9KW
Full Throttle Operating Range (rpm)	4000-5000
Stroke	4
Cylinder	1
Displacement (ml)	112
Bore X Stroke (mm)	59x41
Length X Width X Height (mm)	S: 717x361x1029
	L: 717x361x1156
Weight (kgs)	S: 22
	L: 23
Gear Ratio	2.08(27:13)
Gear Shift Position	F-N-R
Ignition System	TCI
Cooling System	Water-cooling
Starting System	Manual
Control System	Tiller control
Capacity Of Fuel Tank (L)	1.1
Recommended Oil	Regular lead-free gasoline



EPA



MAINBON GROUP COMPANY LIMITED

Tel: +86 (21) 6515-0222/0333/0993/1039, Fax: +86 (21) 6515-0777
Add: 1212, 578 TianBao Road, ShangHai 200086 China

Catalog

Model: F6



Descriptions

- 6HP/4.4kw
- Water cooled
- Manual Start
- Tiller control
- 4stroke outboard engine lubricant

Specifications

MODELS	F6
Max. Output	6HP/4.4KW
Full Throttle Operating Range (rpm)	4000-5000
Stroke	4
Cylinder	2
Displacement (ml)	197
Bore X Stroke (mm)	56x40
Length X Width X Height (mm)	S: 927x350x998 L: 927x350x1125
Weight (kgs)	S: 37 L: 38.5
Gear Ratio	2.08(27:13)
Gear Shift Position	F-N-R
Ignition System	TCI
Cooling System	Water-cooling
Starting System	Manual
Control System	Tiller control
Capacity Of Fuel Tank (L)	39440
Recommended Oil	Regular lead-free gasoline



EPA



MAINBON GROUP COMPANY LIMITED

Tel: +86 (21) 6515-0222/0333/0993/1039, Fax: +86 (21) 6515-0777
Add: 1212, 578 TianBao Road, ShangHai 200086 China

Catalog

Model: F8



Descriptions

- 8HP/5.8kw
- Water cooled
- Manual Start
- Tiller control
- 4stroke outboard engine lubricant

Specifications

MODELS	F8
Max. Output	8HP/5.8KW
Full Throttle Operating Range (rpm)	4500-5500
Stroke	4
Cylinder	2
Displacement (ml)	197
Bore X Stroke (mm)	56x40
Length X Width X Height (mm)	S: 927x350x998 L: 927x350x1125
Weight (kgs)	S: 37 L: 38.5
Gear Ratio	2.08(27:13)
Gear Shift Position	F-N-R
Ignition System	TCI
Cooling System	Water-cooling
Starting System	Manual
Control System	Tiller control
Capacity Of Fuel Tank (L)	39440
Recommended Oil	Regular lead-free gasoline



EPA



MAINBON GROUP COMPANY LIMITED

Tel: +86 (21) 6515-0222/0333/0993/1039, Fax: +86 (21) 6515-0777
Add: 1212, 578 TianBao Road, ShangHai 200086 China

Catalog

Model: F9.9



Descriptions

- 9.9HP/7.3kw
- Water cooled
- Manual Start
- Tiller control
- 4stroke outboard engine lubricant

Specifications

MODELS	F9.9
Max. Output	9.9HP/7.3KW
Full Throttle Operating Range (rpm)	4000-5000
Stroke	4
Cylinder	2
Displacement (ml)	323
Bore X Stroke (mm)	59x59
Length X Width X Height (mm)	S: 1000x427x1080
	L: 1000x427x1207
Weight (kgs)	S: 45
	L: 47
Gear Ratio	2.93(38:13)
Gear Shift Position	F-N-R
Ignition System	TCI
Cooling System	Water-cooling
Starting System	Manual
Control System	Tiller control
Capacity Of Fuel Tank (L)	39440
Recommended Oil	Regular lead-free gasoline



EPA



MAINBON GROUP COMPANY LIMITED

Tel: +86 (21) 6515-0222/0333/0993/1039, Fax: +86 (21) 6515-0777
Add: 1212, 578 TianBao Road, ShangHai 200086 China

Catalog

Model: F15



Descriptions

- 15HP/11kw
- Water cooled
- Manual Start
- Tiller control
- 4stroke outboard engine lubricant

Specifications

MODELS	F15
Max. Output	15HP/11KW
Full Throttle Operating Range (rpm)	4500-5500
Stroke	4
Cylinder	2
Displacement (ml)	323
Bore X Stroke (mm)	59x59
Length X Width X Height (mm)	S: 1000x427x1080 L: 1000x427x1207
Weight (kgs)	S: 45 L: 47
Gear Ratio	2.93(38:13)
Gear Shift Position	F-N-R
Ignition System	TCI
Cooling System	Water-cooling
Starting System	Manual
Control System	Tiller control
Capacity Of Fuel Tank (L)	39440
Recommended Oil	Regular lead-free gasoline
container quantity:	20ft/40ft: 33/66



EPA