




1212, 578 TIANBAO ROAD  
SHANGHAI 200086  
CHINA

# Mainbon Group Company Limited

## 200cc ATV Catalog 2008

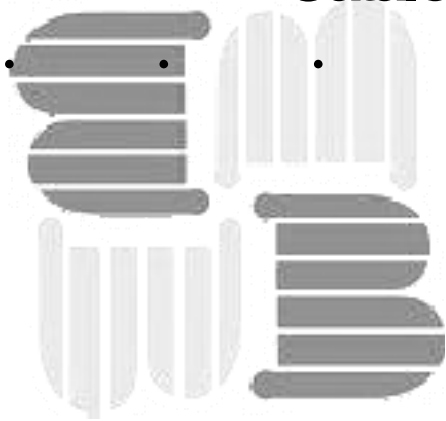

*Top Quality*



+86 (21) 65150222/0333;



+86 (21) 65150777;



sales@exportscooter.com



1212, 578 TianBao Road, Shanghai 200086 China.



# MAINBON GROUP COMPANY LIMITED

Tel: +86 (21) 6515-0222/0333/0993/1039, Fax: +86 (21) 6515-0777  
Add: 1212, 578 TianBao Road, ShangHai 200086 China

*Catalog*

Model: ATV200S-2B



## Descriptions

200cc quad with water-cooling;four stroke engine  
Five Gear and manual clutch  
Arm-swing front hanging

## Specifications

Model No:	ATV200S-2B
Length*Width*Height:	1520*920*1000mm
Wheel Base:	1130mm
Engine Type:	Single Cylinder;water-cooling;four stroke;manual clutch
Start Mode:	Electric
Power:	10.5Kw/7500r/min
Max Torque:	15N.m/5500r/min
Mini Ground Clearance:	140mm
Max Speed:	50
Dry Weight:	145kg
Transmission Mode:	chain
Break Type(F/R):	Drum/Disc
Specification:	12V 9Ah
Climb Degree:	25
Tank Capacity :	4L
Front Hanging:	Arm-swing
Rear Hanging :	Integral
Specification of tyre:	Front-wheel drive:19*7-8 Rear wheel:18*9.5-8
Cylinder Diameter*Journey(mm):	63.5*62.2
Displacement:	196.98ml
Shift Gear:	Five Gear, manual clutch
Height of seats:	750mm
Mini Turning radium:	2000mm
Parking Trig:	Mechanic Lock

Ignition Mode:	C.D.I
Loading Capacity:	150kg
Engine Oil:	1.3L
Gear Wheel oil:	0.3L
Person:	1
Lubrication:	Press Splash
Compression Proportion:	10.5:1
Gas Cylinder number:	Double cylindersParataxis
Parking Dimension(mm):	1485*835*770
Quantity of loading:	20' GP: 29 units
	40' HQ: 64 units
	40' HQ: 66 units





# MAINBON GROUP COMPANY LIMITED

Tel: +86 (21) 6515-0222/0333/0993/1039, Fax: +86 (21) 6515-0777  
Add: 1212, 578 TianBao Road, ShangHai 200086 China

*Catalog*

Model: ATV200S-2C



## Descriptions

200cc quad with Single Cylinder; air-cooling; four stroke engine

Double Arm-swing front Hanging

Four gear with reverse gear, manual clutch

## Specifications

Model No:	ATV200S-2C
Length*Width*Height:	1850*980*1080mm
Wheel Base:	1000mm
Engine Type:	Single Cylinder; air-cooling; four stroke
Start Mode:	Electric
Power:	10.0/7500r/min
Max Torque:	13.5/6500r/min
Mini Ground Clearance:	140mm
Max Speed:	70
Dry Weight:	150kg
Transmission Mode:	Chain
Break Type(F/R):	Drum/Disc
Specification:	12V 9Ah
Climb Degree:	20
Tank Capacity:	4L
Front Hanging:	Double Arm-swing
Rear Hanging:	Integral
Specification of tyre:	Front-wheel drive:19*7-8 Rear wheel:18*9.50-8
Cylinder Diameter*Journey:	C
Displacement:	196.98ml
Shift Gear:	Four gear with reverse gear manual clutch
Height of seats:	800mm

Mini Turning radius:	2400mm
Parking Trig:	Mechanic Lock
Ignition Mode:	CDI
Loading Capacity:	150kg
Engine Oil:	1.1L
Gear Wheel oil:	0.2L
Person:	1
Lubrication:	Press Splash
Compression Proportion:	9.2:1
Gas Cylinder number:	1
Parking Dimension(mm):	1485*835*770
Quantity of loading:	20' GP: 29 units
	40' GP: 64 units
	40' HQ: 66 units





## MAINBON GROUP COMPANY LIMITED

Tel: +86 (21) 6515-0222/0333/0993/1039, Fax: +86 (21) 6515-0777  
Add: 1212, 578 TianBao Road, ShangHai 200086 China

*Catalog*

Model: ATV200S-3



### Descriptions

EEC approved 200cc quad Single Cylinder, air-cooling,  
Four stroke engine  
Double Arm-swing front Hanging  
Four Gear with Reverse Gear , Manual Clutch

### Specifications

Model No:	ATV200S-3
Length*Width*Height:	1585*980*1010
Wheel Base:	1110mm
Engine Type:	Single Cylinder, Air-cooling, Four Stroke
Start Mode:	Electric
Power :	8.9KW/7500r/min
Max Torque:	13.2N.m/6500r/min
Mini Ground Clearance:	150mm
Max Speed:	72
Dry Weight:	150kg
Transmission Mode:	Axis
Break Type(F/R):	Drum / Drum
Specification:	12V 9Ah
Climb Degree:	20
Tank Capacity:	4L
Front Hanging:	Double arm-swing
Rear Hanging:	Integral
Specification of tyre:	Front Wheel:19*7-8    Rear Wheel:18*9.50-8
Cylinder Diameter*Journey:	63.5*62.2mm
Displacement:	196.7ml
Shift Gear:	Four Gear with Reverse Gear , Manual Clutch
Height of seats:	770mm
Mini Turning radium:	2400mm
Parking Trig:	Mechanical Lock

Ignition Mode:	C.D.I
Loading Capacity:	150kg
Engine Oil:	1L
Gear Wheel oil:	0.2L
Person:	1
Lubrication:	Press Splash
Compression Proportion:	9.2:1
Parking Dimension(mm):	1490*840*770
Quantity of loading:	20' GP: 29 units
	40' GP: 64 units
	40' HQ: 66 units



EPA



# MAINBON GROUP COMPANY LIMITED

Tel: +86 (21) 6515-0222/0333/0993/1039, Fax: +86 (21) 6515-0777  
Add: 1212, 578 TianBao Road, ShangHai 200086 China

*Catalog*

Model: ATV200S-3A



## Descriptions

EEC approved 200cc quad with Single Cylinder,  
air-cooling, Four stroke engine  
Double Arm-swing front Hanging  
Four Gear with Reverse Gear , Manual Clutch

## Specifications

Model No:	ATV200S-3A
Length*Width*Height:	1585*980*1010MM
Wheel Base:	1110mm
Engine Type:	Single Cylinder, Air-cooling, Four Stroke
Start Mode:	Electric
Power:	8.9KW/7500r/min
Max Torque:	13.2N.m/6500r/min
Mini Ground Clearance:	150mm
Max Speed:	72
Dry Weight:	150kg
Transmission Mode:	Axis
Break Type(F/R):	Drum / Drum
Specification:	12V 9Ah
Climb Degree:	20
Tank Capacity:	4L
Front Hanging:	Double arm-swing
Rear Hanging:	Integral
Specification of tyre:	Front Wheel:19*7-8    Rear Wheel:18*9.50-8
Cylinder Diameter*Journey:	63.5*62.2mm
Displacement:	196.98ml
Shift Gear:	Four Gear with Reverse Gear , Manual Clutch
Height of seats:	770mm
Mini Turning radium:	2400mm
Parking Trig:	Mechanical Lock



Ignition Mode:	C.D.I
Loading Capacity:	150kg
Engine Oil:	1.1L
Gear Wheel oil :	0.2L
Person:	1
Lubrication:	Press Splash
Compression Proportion:	9.2:1
Parking Dimension:	1490*840*770mm
Quantity of loading:	20' GP: 29 units
	40' GP: 64 units
	40' HQ: 66 units



EPA



## MAINBON GROUP COMPANY LIMITED

Tel: +86 (21) 6515-0222/0333/0993/1039, Fax: +86 (21) 6515-0777  
Add: 1212, 578 TianBao Road, ShangHai 200086 China

*Catalog*

Model: ATV200S-4



### Descriptions

200cc quad with Single Cylinder, water-cooling,  
Four stroke engine  
Arm-swing front Hanging  
Five gear Shift Gear, automatic

### Specifications

Model No:	ATV200S-4
Length*Width*Height:	1850*1030*1130mm
Wheel Base:	1160mm
Engine Type:	Single Cylinder,water-cooling,Four stroke
Start Mode:	Electric
Power:	10.5Kw/7500r/min
Max Torque:	15N.m/5500r/min
Mini Ground Clearance :	155mm
Max Speed:	55
Dry Weight:	230kg
Transmission Mode:	Axis
Break Type(F/R):	Drum/Drum
Specification:	12V 14Ah
Climb Degree:	25
Tank Capacity:	11L
Front Hanging:	Arm-swing
Rear Hanging:	Integral
Specification of tyre:	Front-wheel drive:23*7-10 Rear wheel:22*10-10
Cylinder Diameter*Journey:	63.5*62.2mm
Displacement:	196.9ml
Shift Gear:	Five gearautomatic
Height of seats:	820mm
Mini Turning radium:	2900mm
Parking Trig:	Mechanic Lock

Ignition Mode:	C.D.I
Loading Capacity:	165kg
Engine Oil:	1.3L
Gear Wheel oil:	0.25L
Person:	1
Lubrication:	Press Splash
Compression Proportion:	10.5:1
Gas Cylinder number:	1
Parking Dimension:	1970*1110*880mm
Quantity of loading:	20' GP: 12 units
	40' GP: 24 units
	40' HQ: 36 units





## MAINBON GROUP COMPANY LIMITED

Tel: +86 (21) 6515-0222/0333/0993/1039, Fax: +86 (21) 6515-0777  
Add: 1212, 578 TianBao Road, ShangHai 200086 China

*Catalog*

Model: ATV200S-6



### Descriptions

200cc quad with Single Cylinder, water-cooling,  
Four stroke engine  
Double Arm-swing front Hanging  
Four gear with reverse gear, manual clutch

### Specifications

Model No:	ATV200S-6
Length*Width*Height:	1850*980*1080mm
Wheel Base:	1000mm
Engine Type:	Single Cylinder; water-cooling; four stroke
Start Mode:	Electric
Power:	10.3/7500r/min
Max Torque :	14.2/6500r/min
Mini Ground Clearance:	140mm
Max Speed:	70
Dry Weight:	150kg
Transmission Mode:	Chain
Break Type(F/R):	Drum/Disc
Specification:	12V 9Ah
Climb Degree:	20
Tank Capacity :	4L
Front Hanging:	Double Arm-swing
Rear Hanging:	Integral
Specification of tyre:	Front-wheel drive:19*7-8 Rear wheel:18*9.50-8
Cylinder Diameter*Journey:	63.5*62.2mm
Displacement:	196.98ml
Shift Gear:	Four gear with reverse gear manual clutch
Height of seats:	800mm

Mini Turning radius:	2400mm
Parking Trig:	Mechanic Lock
Ignition Mode:	CDI
Loading Capacity:	150kg
Engine Oil:	1.1L
Gear Wheel oil:	0.2L
Person:	1
Lubrication:	Press Splash
Compression Proportion:	10.5:1
Gas Cylinder number:	1
Parking Dimension:	1485*835*770mm
Quantity of loading:	20' GP: 29 units
	40' GP: 64 units
	40' HQ: 66 units





## MAINBON GROUP COMPANY LIMITED

Tel: +86 (21) 6515-0222/0333/0993/1039, Fax: +86 (21) 6515-0777  
Add: 1212, 578 TianBao Road, ShangHai 200086 China

*Catalog*

Model: ATV200S-6A



### Descriptions

200cc quad with Single Cylinder, water-cooling,  
Four stroke engine  
Front hanging: integral ballonet absorber  
Rear hanging: inner ballonet absorber  
Four gear with reverse gear, manual clutch

### Specifications

Model No: ATV200S-6A

Specifications:

Features:

- 1) Dimensions (L x W x H): 180 x 112 x 113cm
- 2) Wheel base: 115cm
- 3) Engine type: single cylinder, water-cooling, 4-stroke
- 4) Start mode: electric
- 5) Power: 10.3kW/7,500rpm
- 6) Max. torque: 15N.m/6,000rpm
- 7) Max. speed: 75km/h
- 8) Min. ground clearance: 120mm
- 9) Dry weight: 155kg
- 10) Transmission mode: chain
- 11) Break type (F/R): drum / disc
- 12) Power source: 12V, 9Ah
- 13) Climbing degree: 20
- 14) Fuel tank capacity: 4L
- 15) Front hanging: integral ballonet absorber
- 16) Rear hanging: inner ballonet absorber
- 17) Tires:
  - a) Front wheels: 21 x 7 - 10
  - b) Rear wheels: 20 x 10 - 10
- 18) Cylinder size: 63.5 x 62.2mm
- 19) Displacement: 197mL

20) Transmission: 4 gears with one reverse gear, manual clutch

21) Height of seats: 880mm

22) Min. turning radius: 2,650mm

23) Parking trig: mechanical lock

24) Ignition mode: CDI

25) Load capacity: 150kg

26) Engine oil: 1.1L

27) Gas cylinder number:1

28) Max. number of riders: 1

29) Lubrication: press splash

30) Compression proportion: 9.2:1

Outer packing:

Dimensions: 148 x 85 x 88cm

Conveyance:

Qty/20' GP: 20 units

Qty/40' GP: 44 units

Qty/40' HQ: 66 units





## MAINBON GROUP COMPANY LIMITED

Tel: +86 (21) 6515-0222/0333/0993/1039, Fax: +86 (21) 6515-0777  
Add: 1212, 578 TianBao Road, ShangHai 200086 China

*Catalog*

Model: ATV200S-6N



### Descriptions

200cc quad with Single Cylinder, water-cooling,  
Four stroke engine  
Front hanging: integral ballonet absorber  
Rear hanging: inner ballonet absorber  
Four gear with reverse gear, manual clutch

### Specifications

Model No: ATV200S-6N

Specifications:

- 1) Dimensions (L x W x H): 1740 x 1120 x 1140mm
- 2) Wheelbase: 1150mm
- 3) Engine type: 200cc, single cylinder, Water-Cooling, 4-stroke
- 4) Start mode: electric
- 5) Power: 10.3kW/7,500rpm
- 6) Max. torque: 15N.m/6,000rpm
- 7) Max. speed: 75km/h
- 8) Min. ground clearance: 130mm
- 9) Dry weight: 155kg
- 10) Transmission mode: chain
- 11) Break type (F/R): drum/disc
- 12) Power source: 12V, 9A
- 13) Climbing degree: 20 degrees
- 14) Fuel tank capacity: 4L
- 15) Front hanging: integral ballonet absorber
- 16) Rear hanging: inner ballonet absorber
- 17) Tires:
  - a) Front wheels: 21 x 7 - 10
  - b) Rear wheels: 20 x 10 - 10
- 18) Cylinder size: 63.5 x 62.2mm
- 19) Displacement: 197ml
- 20) Transmission: 4 gears with one reverse gear, manual clutch



21) Seat height: 880mm

22) Min. turning radius: 2,650mm

23) Parking trig: mechanical lock

24) Ignition mode: CDI

25) Load capacity: 150kg

26) Engine oil: 1.1L

27) Gas cylinder number: 1

28) Max. number of riders: 1

29) Lubrication: press splash

30) Compression proportion: 9.2: 1

Outer packing:

Carton dimensions: 1480 x 950 x 880mm

Conveyance:

Qty/20' GP: 20 units

Qty/40' GP: 44 units

Qty/40' HQ: 66 units



EPA



## MAINBON GROUP COMPANY LIMITED

Tel: +86 (21) 6515-0222/0333/0993/1039, Fax: +86 (21) 6515-0777  
Add: 1212, 578 TianBao Road, ShangHai 200086 China

*Catalog*

Model: ATV200S-7



### Descriptions

200cc quad with single cylinder, Water-Cooling, 4-stroke engine

Front hanging: integral ballonet absorber

Rear hanging: inner ballonet absorber

4 gears with one reverse gear, manual clutch

### Specifications

Model No: ATV200S-7

Specifications:

Features:

- 1) Dimensions (L x W x H): 1800 x 1120 x 1130mm
- 2) Wheelbase: 1150mm
- 3) Engine type: 200cc, single cylinder, Water-Cooling, 4-stroke
- 4) Start mode: electric
- 5) Power: 10.3kW/7,500rpm
- 6) Max. torque: 15N.m/6,000rpm
- 7) Max. speed: 75km/h
- 8) Min. ground clearance: 120mm
- 9) Dry weight: 155kg
- 10) Transmission mode: chain
- 11) Break type (F/R): drum/disc
- 12) Power source: 12V, 9A
- 13) Climbing degree: 20 degrees
- 14) Fuel tank capacity: 4L
- 15) Front hanging: integral ballonet absorber
- 16) Rear hanging: inner ballonet absorber
- 17) Tires:
  - a) Front wheels: 21 x 7 - 10
  - b) Rear wheels: 20 x 10 - 10
- 18) Cylinder size: 63.5 x 62.2mm
- 19) Displacement: 197ml

20) Transmission: 4 gears with one reverse gear, manual clutch

21) Seat height: 880mm

22) Min. turning radius: 2,650mm

23) Parking trig: mechanical lock

24) Ignition mode: CDI

25) Load capacity: 150kg

26) Engine oil: 1.1L

27) Gas cylinder number: 1

28) Max. number of riders: 1

29) Lubrication: press splash

30) Compression proportion: 9.2: 1

Outer packing:

Carton dimensions: 1480 x 950 x 880mm

Conveyance:

Qty/20' GP: 20 units

Qty/40' GP: 44 units

Qty/40' HQ: 66 units

